

VICES, MAGNETS & CLAMPS

BAR CLAMPS FOR CONSTRUCTION & WOODWORKING

PARALLEL BAR CLAMPS K BODY® REVO™

- Large parallel jaw surfaces are made from non-marring polyamide
- Internal steel frames insure 90° angles
- Large composite handle for better comfort while working
- Bessey® anti-slip system for improved grip and safety
- Swivel fitting ensures clamp sits parallel to the bench top
- 3 3/4" throat depth




Model No.	Mfg. No.	Clamping Capacity"	Spreading Capacity"	Price /Each
UAD669	KRE3512	12	10-1/2 to 15-5/16	
UAD670	KRE3524	24	10-1/2 to 28-3/4	
UAD671	KRE3531	31	10-1/2 to 36-1/2	
UAD672	KRE3540	40	10-1/2 to 44-1/2	
UAD673	KRE3550	50	10-1/2 to 52-1/2	
UAD674	KRE3560	60	10-1/2 to 63-3/8	
TKZ910	KRE3582	82	10-1/2 to 81-7/8	
UAD676	KRE3598	98	10-1/2 to 101-1/2	

ACCESSORIES FOR PARALLEL CLAMPS

KP FRAMING SYSTEMS

- Blocks align clamps for door and panel construction
- Clamps sit in grooves to make 90° angles
- Four blocks to a set

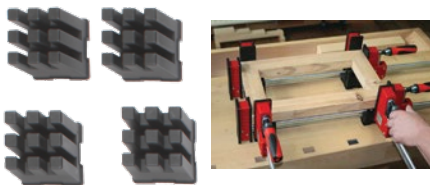

Model No. TKZ957

Mfg. No. KP Blocks

Price/Set \$

K BODY® EXTENDERS

- Connects two Bessey® clamps together for extended reach
- Durable aluminum construction
- Includes: Extender, nuts, bolts and washers

Model No. TKZ959

Mfg. No. K Body Extender

Price/Each \$



TG PROFESSIONAL SERIES MALLEABLE CAST CLAMPS

- High quality construction
- Perfect for high pressure applications and wide openings
- Two part composite handle



Model No.	Mfg. No.	Clamping Capacity"	Throat Depth"	Clamping Force (lbs.)	Price /Each
LIGHT-DUTY					
TKZ912	TGJ2.5062K	6	2 1/2	600	
TKZ913	TGJ2.5122K	12	2 1/2	600	
TKZ914	TGJ2.5182K	18	2 1/2	600	
TKZ915	TGJ2.5242K	24	2 1/2	600	
TKZ916	TGJ2.5302K	30	2 1/2	600	
TKZ917	TGJ2.5362K	36	2 1/2	600	
TKZ918	TG4.0082K	8	4	880	
TKZ919	TG4.0122K	12	4	880	
TKZ920	TG4.0162K	16	4	880	
TKZ921	TG4.0242K	24	4	880	

Model No.	Mfg. No.	Clamping Capacity"	Throat Depth"	Clamping Force (lbs.)	Price /Each
MEDIUM-DUTY					
TKZ922	TG4.5122K	12	4 1/2	1000	
TKZ923	TG4.5182K	18	4 1/2	1000	
TKZ924	TG4.5242K	24	4 1/2	1000	
TKZ925	TG4.5302K	30	4 1/2	1000	
TKZ926	TG4.5402K	40	4 1/2	1000	
TKZ927	TG5.5122K	12	5 1/2	1320	
TKZ928	TG5.5182K	18	5 1/2	1320	
TKZ929	TG5.5242K	24	5 1/2	1320	
TKZ932	TG7.0162K	16	7	1320	
TKZ933	TG7.0242K	24	7	1320	
TKZ936	TG7.0482K	48	7	1320	

Model No.	Mfg. No.	Clamping Capacity"	Throat Depth"	Clamping Force (lbs.)	Price /Each
HEAVY-DUTY					
TKZ937	TGK4.5162K	16	4 1/2	1540	
TKZ938	TGK4.5242K	24	4 1/2	1540	
TKZ939	TGK4.5402K	40	4 1/2	1540	
TKZ940	TGK4.5502K	50	4 1/2	1540	
TKZ941	TGK4.5792K	79	4 1/2	1540	

Model No.	Mfg. No.	Clamping Capacity"	Throat Depth"	Clamping Force (lbs.)	Price /Each
DEEP REACH					
TKZ942	CDS24-10WP	24	10	1550	
TKZ943	CDS24-12WP	24	12	1550	
TKZ944	CDS24-20WP	24	20	990	

QUICK-GRIP® ONE-HANDED CLAMPS

BAR CLAMPS/SPREADERS

- Quick-Change® jaw quickly converts from clamp to spreader and requires no tools
- Constructed of high-tech reinforced resin for strength and durability
- Exerts up to 250 lbs. of clamping pressure
- Patented pistol grip design enhances comfort and ease of use
- Non-marring pads grip firmly and protect workpiece
- Ideal for clamping/gluing, holding work for sawing/drilling and positioning work for fastening



MINI BAR CLAMPS

- 25% smaller than Quick-Change® clamps for smaller projects or for working in confined spaces
- Constructed of high-tech reinforced resin for strength and durability
- Exerts up to 150 lbs. of clamping pressure
- Patented pistol grip design enhances comfort and ease of use
- Non-marring pads grip firmly and protect workpiece
- Ideal for clamping/gluing, holding work for sawing/drilling and positioning work for fastening



Model No.	Mfg. No.	Clamping Capacity	Spreading Capacity	Throat Depth	Price /Each
TAW063	506QC	6" (15 cm)	7 1/2" - 14 5/8" (195 mm - 360 mm)	3 1/4" (80 mm)	
TAW062	512QC	12" (30 cm)	7 1/2" - 20 5/8" (195 mm - 515 mm)	3 1/4" (80 mm)	
TBR688	518QC	18" (45 cm)	7 1/2" - 26 5/8" (195 mm - 665 mm)	3 1/4" (80 mm)	
TBR689	524QC	24" (60 cm)	7 1/2" - 32 5/8" (195 mm - 820 mm)	3 1/4" (80 mm)	

Model No.	Mfg. No.	Clamping Capacity	Spreading Capacity	Throat Depth	Price /Each
TBR758	5412	12" (30 cm)	-	2 7/16" (62 mm)	

